



JUNFENG

QINGDAO JUNFENG INDUSTRY COMPANY LIMITED

Fiberglass Products Experts Focus on Building Materials



Website: www.fibermesh.net

E-Mail: smz@jnf.net.cn



“ About us

Welcome to Qingdao Junfeng Industry Company Limited.

As a professional manufacturer of fiberglass products, We found in 2000 and have over 200 staff now, with a yearly output of fiberglass products totally more than twenty millions US dollars.

Our main products include fiberglass mesh, fiberglass drywall tape, fiberglass cloth, fiberglass mat, fiberglass insect screen, fiberglass tissue, paper joint tape, metal corner tape, etc.



Fiberglass Mesh

For interior & exterior plaster

▲ Glass fiber mesh size :


- 160gsm 4x4 5x5
- 145gsm 4x4 5x5
- 125gsm 4x4 5x5
- 100gsm 4x4 5x5
- 80gsm 4x4 5x5
- 75gsm 4x4 5x5
- 60gsm 8x8 20x10
- 45gsm 3x3

▲ Application:

Wall plaster reinforcement. External wall heat insulation, Waterproofing plaster base, Marble & Mosaic backing, etc.

▲ Advantage:

High tensile strength, Acid and alkali resistance, Fire-retardant, Heat insulation.

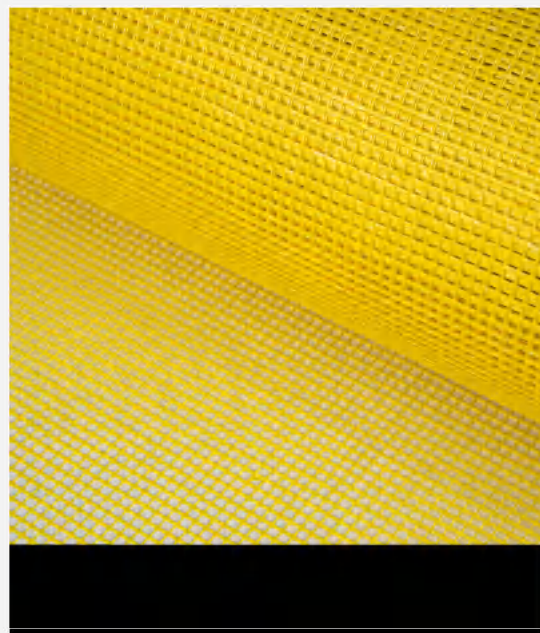



Fiberglass Drywall Joint Tape

Seaming drywall joints, reinforce or repair wall cracks, Plasterboard cracks, and cement board etc.

Size of glass fiber drywall joint tape:

- 50gsm 8x8
- 60gsm 9x9
- 65gsm 9x9
- 70gsm 9x9
- 75gsm 9x9
- Roll size: 50mmx45m, 50mmx90m, or customized.


Application:

Ceiling and gypsum board jointing. Cracks repairing for drywall and other wall damage, etc.

Advantage:

Excellent alkali resistance and self-adhesiveness, High tensile strength and deformation resistance, anti-cracking and durable, no bubbles or blisters.



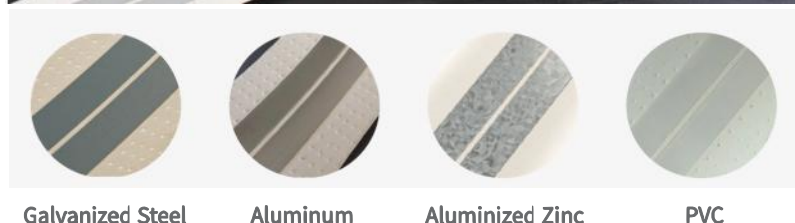

Galvanized Steel

Aluminum

Aluminized Zinc

PVC

Flexible Metal Corner Tape

To prevent corner damage during decoration

- Steel corner tape
- Aluminum corner tape
- Plastic corner tape
- Specification: 50mmx30m/roll or customized.

Self-adhesive PVC Corner Bead Tape

Inside & Outside Corner Crack

Size:

- 50mmx30m
- 50mmx40m
- 50mmx50m
- Customized

Application:

Provides straight, strong corners on any inside or outside angle, resisting edge cracking and chipping





JUNFENG



Laser holes

Needle holes

Paper Joint Tape

(Used for processing seams, internal and external corners prior to painting, texturing and wallpapering)

Specification:

• 130gsm • 135gsm • 145gsm

Roll size:

• 50mmx23m/roll • 50mmx75m/roll
• 50mmx150m/roll

Fibafuse Tape/ Fiberglass Tissue Tape

(Roofing for waterproof, cracks on the wall or ceiling, gypsum wall board, and other kinds of good quality material of leakage control and corrosion protection.)

Specification:

• 30gsm • 40gsm • 60gsm
• 70gsm • 90gsm

Roll size:

• 50mm*25m • 50mm*45m • 50mm*90m
• 1mx50m • 1mx25m • 1mx90m





JUNFENG

Chopped Fiber Strands

Widely used in wall, bridges reinforcement, anti-cracking, engineering plastic reinforcement materials, reinforced cement, etc.

C-Glass/ D-Glass/ AR-Glass/ PP fiber

Length:


- 3mm
- 6mm
- 9mm
- 12mm
- 15mm
- 30cm
- 50mm

Package:

- 600g/bag
- 1kg/bag
- 25kg/bag
- customized



Abrasive Sanding Screen Mesh

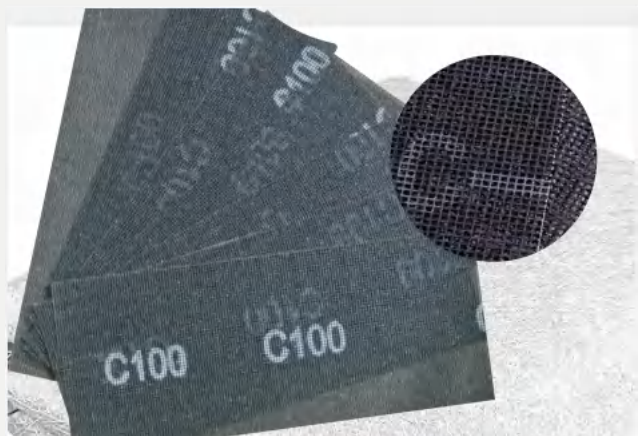

To be used in surface cleaning, such as wall, wood, resin, jade, metal polishing, etc.

- AL2O3 105MM*280MM
- AL2O3 110MM*280MM
- SIC 105MM*280MM
- SIC 110MM*280MM

Wall Patch

Repair holes or cracks on wall or ceiling

Specification

Product size	Aluminum Patch Size	Fiberglass Mesh Size	Package Pcs/box
2"x2"	5cm x 5cm	10cm x 10cm	200
4"x4"	10cm x 10cm	15cm x 15cm	100
6"x6"	15cm x 15cm	20cm x 20cm	100
8"x8"	20cm x 20cm	25cm x 25cm	100



Add: Rm102, Unit 1, 17th Building, Yin Xiang Shan Gardon, No.22 Jinsong 3rd Road, Qingdao, China, 266000.
Email: smz@jnf.net.cn · Wechat/Whatsapp: +86 159 089 835 39 · www.fibermesh.net



Fiberglass Windows Screen


Used in high-grade office buildings, residential buildings and various buildings, livestock farms, orchards, insects, mosquitoes, the best protection products.

Specification:

- 80gsm 12x12
- 80gsm 17x15
- 90gsm 16x14
- 105gsm 17x15
- 115gsm 18x16
- Width: 0.6-2.7 M.

Color:

- white
- black
- gray
- gray white (gray)

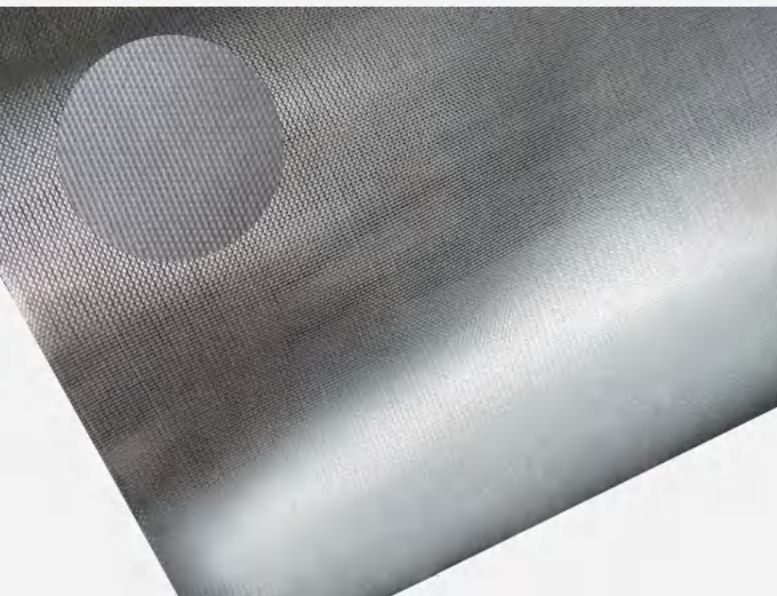

Fiberglass cloth

Specification:

- 280gsm
- 420gsm
- 550gsm
- 630gsm
- 840gsm

Application:


Car repair, Boat repair, Aircraft repair, Electrical insulation, etc.



Fiberglass Chopped Strands Mat

Popular material to be used in hand lay-up process and filament winding, compression molding and continuous laminating processes.

Glass type	Bond type	Density	Roll Width	Roll Length
E-GLASS	Powder	100g/m2	750mm	28kgs
		180g/m2	1040mm	
		225g/m2	1250mm	30kgs
C-GLASS	Emulsion	300g/m2	1270mm	
		450g/m2	1450mm	35kgs
		600g/m2	200mm-2600mm	Other weight

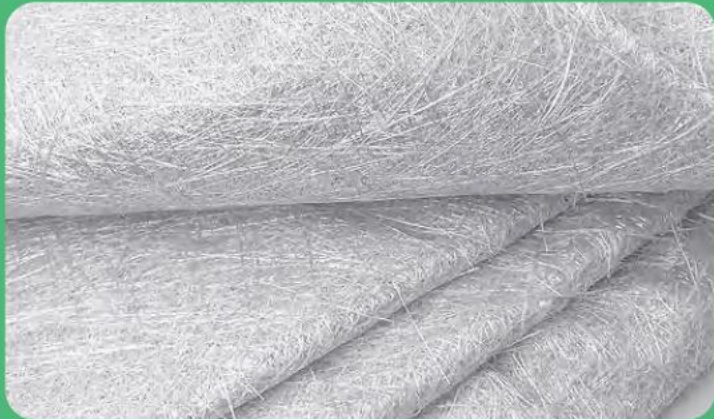

Specifications can be made as per customers requirements. Cut sheet and individually wrapped is acceptable.



Fiberglass Needle Mat

Thermal and acoustic insulation for thin panel and nail-board by fire-proofing fabrics, used for the thermal insulation and sound absorption of engine system.

Fiber Glass Needle Mat						
Thickness: (mm)	3/4	5/6	8/10/12	15	20	25
Roll width: (mm)	1050mm					
Roll length: (m)	40	30	20	15	10	10
Density: kg/m3)	110-130	120-140	120-150	140-160	140-160	140-160

Application:

- 1) Fiberglass moulding processes such as GMT,RTM,AZDEL.
- 2) For a variety of insulation, fire protection materials.
- 3) To be used in insulation board in household appliances such as air-condition, refrigerator, microwave ovens, dishwashers, etc.
- 4) For cars, boats, aircraft and other parts of the noise, insulation, heat resistance.






JUNFENG

Fiberglass Woven Roving

Hand lay-up, winding and compress molding process, suitable for manufacturing tank, boat, automobile parts and other FRP products.

Style	Thickness(mm)	Width(cm)	Weight(g/m2)
CWR200	0.200 ±0.020	30-200	190 ±20
CWR300	0.300 ±0.030	30-200	300 ±30
CWR400	0.400 ±0.040	30-200	380 ±40
CWR600	0.600 ±0.060	30-200	600 ±30
CWR800	0.800 ±0.080	30-200	800 ±40
EW200	0.200 ±0.020	30-200	190 ±20
EW360	0.360 ±0.036	30-200	350 ±40
EW400	0.400 ±0.040	30-200	380 ±30
EW500	0.500 ±0.050	30-200	500 ±30
EW600	0.600 ±0.060	30-200	600 ±30
EW800	0.800 ±0.080	30-200	800 ±40
EW1200	1.200 ±0.120	30-200	1200 ±50

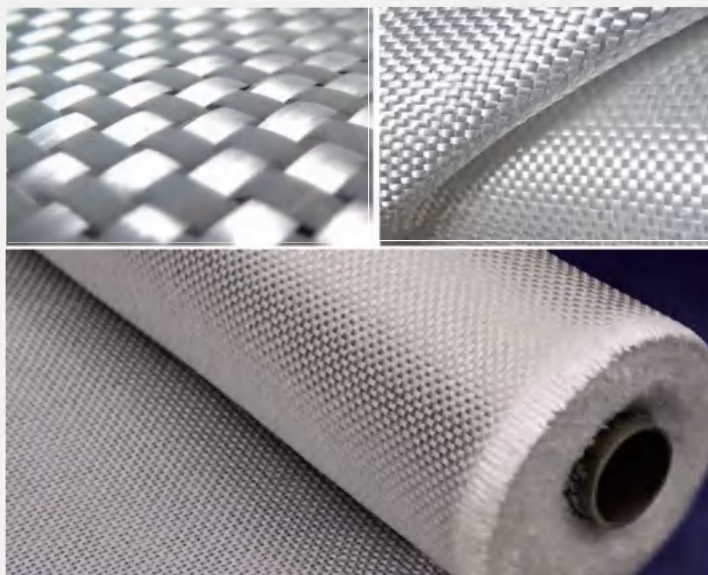

Add: Rm102, Unit 1, 17th Building, Yin Xiang Shan Garden, No.22 Jinsong 3rd Road, Qingdao, China, 266000.
Email: smz@jnf.net.cn · Wechat/Whatsapp: +86 159 089 835 39 · www.fibermesh.net

